

Platform Trucks
Capacity Range
1,000 – 2,000 lbs.

★ = two-day PRONTO® shipment. **PM6600/6800 Selection Table**

Platform Size Inches	SELECTION SUFFIX			Approx. Weight Lbs.
	6" and 8" Models		8" Models	
	Plastex	Versa-Tech®	Ace-Tuf®	
24 x 48★	-P2448★	-TE2448★	-AT2448★	130
27 x 54★	-P2754★	-TE2754★	-AT2754★	145
30 x 60★	-P3060★	-TE3060★	-AT3060★	180

Request quote from factory with bumpers.



TO ORDER, SPECIFY MODEL NUMBER AND SUFFIX



★ **PM6800-A**
Shown with optional bumpers.



★ **AL2006-A**
Lightweight aluminum body.

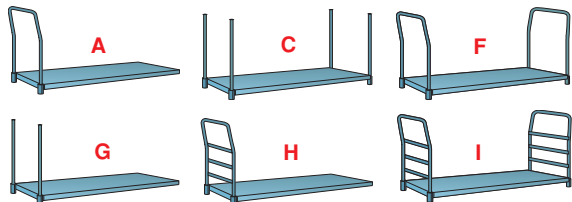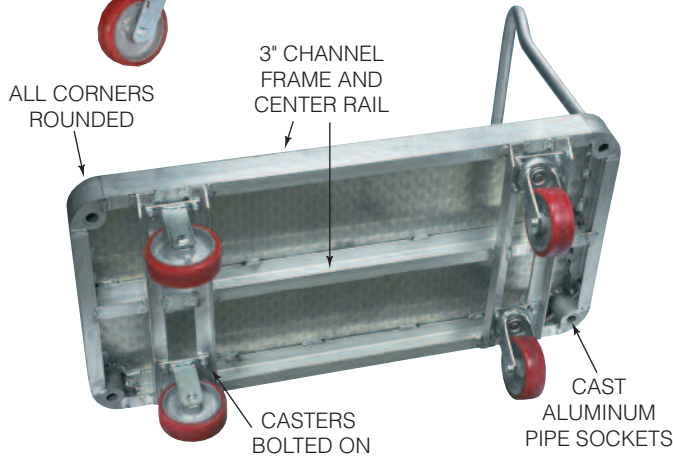

QUALITY FEATURES

- Features all welded deck of 12 ga. sheet steel.
- Two formed 12 ga. steel bolsters run longitudinally under truck (3 bolsters on 30"x 60" size).
- Roller bearings in *Plastex* and *Versa-Tech®* wheels, ball bearings in *Ace-Tuf®* wheels.
- Capacity 1,000 lbs.; 1,400 lbs. on 30"x 60" size with *Plastex* or *Versa-Tech®* wheels.

Model PM6600 has two swivel and two rigid casters welded on: choice of 6" x 2" *Plastex* or *Versa-Tech®* wheels. Platform height 10¾".

Model PM6800 has two swivel and two rigid casters welded on: choice of 8" x 2" *Plastex* *Versa-Tech®* or 8 x 2.50 *Ace-Tuf®* wheels. Platform height 12¾".

Available with Superstructure Styles A, C, F, G, H, I.

★ All models shippable **PRONTO®!**

QUALITY FEATURES

- All the features most wanted by food processing plants, dairies, hospitals, schools, airports, hotels, etc. Cast pipe sockets integrally welded into all four corners permit using handle at either end.
- Deck of ½" diamond tread aluminum alloy (6061T).
- Casters bolted to ¾" aluminum angle cross bolsters.
- Roller bearings in all wheels.
- Capacity 1,100 lbs. with Pneumatics, 1,500 lbs. with *Versa-Tech®* rubber wheels, and 2,000 lbs. with *Polylast* polyurethane wheels.
- For stainless steel casters and rubber bumpers, consult factory.

Model AL2006 trucks have 6" x 2" wheels in two swivel and two rigid casters. Platform height 10¾".

Model AL2008 trucks have 8" x 2" wheels in two swivel and two rigid casters. Platform height 12¾", slightly higher with Pneumatic-tired wheels.

Available with Superstructure Styles A, F, H, and I.

★ All models shippable **PRONTO®!**

TO ORDER, SPECIFY MODEL NUMBER AND SUFFIX

★ = two-day PRONTO® shipment. **AL2006/2008 Selection Table**

Platform Size Inches	SELECTION SUFFIX			Approx. Weight Lbs.
	Models 2006 and 2008		Model 2008	
	<i>Polylast</i>	<i>Versa-Tech®</i>	Pneumatic	
24 x 48★	-AY2448★	-TE2448★	-PR2448★	80
30 x 48★	-AY3048★	-TE3048★	-PR3048★	85
30 x 60★	-AY3060★	-TE3060★	-PR3060★	93
36 x 72★	-AY3672★	-TE3672★	-PR3672★	105

WHEEL CHOICES for more help, see pages 14 & 15

