

Platform Trucks

Capacity Range
2,500 – 3,000 lbs.



PW915-A Solid hardwood construction, internal sockets.
Available with Superstructure Styles A, G, H, and J.



PM5500-H Sturdy all steel design.
Available with Superstructure Styles A, G, H, and J.



PB1058-A Steel angle frame supports hardwood deck.
Available with Superstructure Styles A, C, F, G, H, I, J and K.

QUALITY FEATURES

- Load wheels 12" x 2½" on 1" diameter axle.
- Swivel caster wheels 8" x 2" on PB1058 and PM5500; 6" x 2" on PW915 except with Pneumatic-tired wheels (12 x 4.10-6 load wheels and 8 x 2.80-4 caster wheels).
- Roller bearings and lube fittings in all wheels.
- Removable pipe handle.


UNIQUE SPECIFICATIONS			
Model No.	PW915-A	PB1058-A	PM5500-A
Deck	1" hardwood	1" hardwood	12 ga. steel
Frame	2" x 4" hardwood	3" x 2" x ⅜" angle	3" channel
Center longitudinal	1¾" hardwood	1½" hardwood (30" and 36" widths only)	3" channel
Platform Height	14"	15"	12½"

PW915, PB1058 & PM5500 Selection Table

Platform Size Inches	SELECTION SUFFIX						Approx. Weight Lbs.		
	Duralast®	Metal	Moldon Rubber †	Plastex	Poly-Soft®	Pneumatic Tires (PW915 only) †	Model PW915	Model PB1058	Model PM5500
24 x 48	-DB3024	-M2448	-R2448	-P2448	-SPB2448	-PR2448	170	170	205
30 x 48	-DB3048	-M3048	-R3048	-P3048	-SPB3048	-PR3048	185	180	220
30 x 60	-DB3060	-M3060	-R3060	-P3060	-SPB3060	-PR3060	205	195	240
36 x 60	-DB3660	-M3660	-R3660	-P3660	-SPB3660	-PR3660	215	215	265
36 x 72	-DB3672	-M3672	-R3672	-P3672	-SPB3672	-PR3672	235	235	280

TO ORDER, SPECIFY MODEL NUMBER AND SUFFIX

† Capacity limited to 2,500 lbs. with Moldon Rubber Wheels.
† Capacity limited to 2,000 lbs. with Pneumatic-tired Wheels.

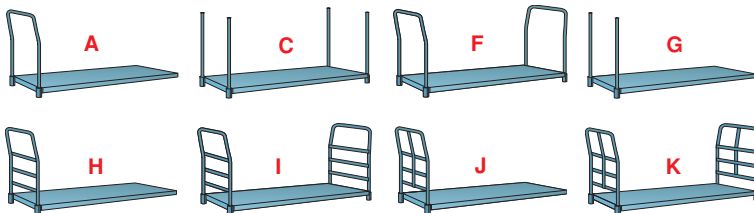

WHEEL CHOICES for more help, see pages 14 & 15

